


BULLETIN  
CM—MCB  
JUNE 2007

**MAIN CIRCUIT BREAKERS**  
FOR  
ERICKSON ELECTRICAL EQUIPMENT CO.  
**COMMERCIAL METERING PANELBOARDS**  
FOR 3Ø-4W SYSTEMS, 208Y/120V. OR 240/120V. DELTA

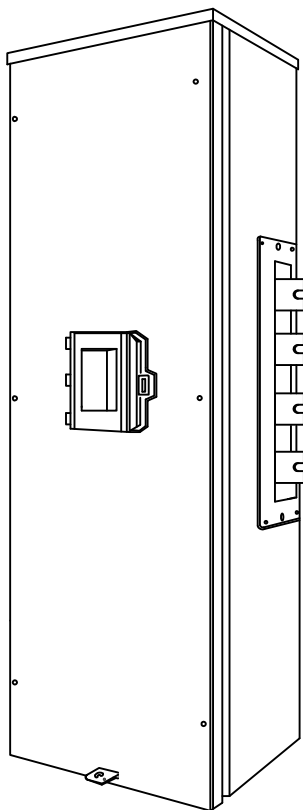

**FEATURES:**

- TYPE 3R ENCLOSURES FOR OUTDOOR OR INDOOR INSTALLATION.
- SHORT CIRCUIT CURRENT RATINGS OF MAIN CIRCUIT BREAKERS ARE 42,000 TO 100,000 RMS SYM. AMPS, HOWEVER THE SHORT CIRCUIT CURRENT RATING OF THE METER CENTER IS LIMITED TO THE SHORT CIRCUIT RATINGS OF BRANCH OVERCURRENT DEVICES.
- LISTED BY UNDERWRITERS LABORATORIES INC, UNDER FILE E80799, 'ADAPTERS, CIRCUIT BREAKER'
- MAIN LUGS ARE SUITABLE FOR COPPER OR ALUMINUM CONDUCTORS.
- ALUMINUM ENCLOSURES NEVER RUST, INSTALL EASILY.




**APPLICATION:** FOR USE WITH ERICKSON TYPE CM COMMERCIAL METERING PANELBOARDS AND OTHER METERING EQUIPMENT WHERE MAIN CIRCUIT BREAKERS ARE INDICATED OR DESIRED.

**RATINGS:** 400, 600, 800 AND 1200 AMPS. SIZES ARE AVAILABLE.

**[www.ericksonelectric.com](http://www.ericksonelectric.com)**

**ERICKSON ELECTRICAL EQUIPMENT CO.**  
475 BONNIE LANE • ELK GROVE VILLAGE, IL 60007  
TELEPHONE: (847) 640-7701 / 1-800-952-7225  
FAX: (847) 640-0565

# 240V MAIN CIRCUIT BREAKERS

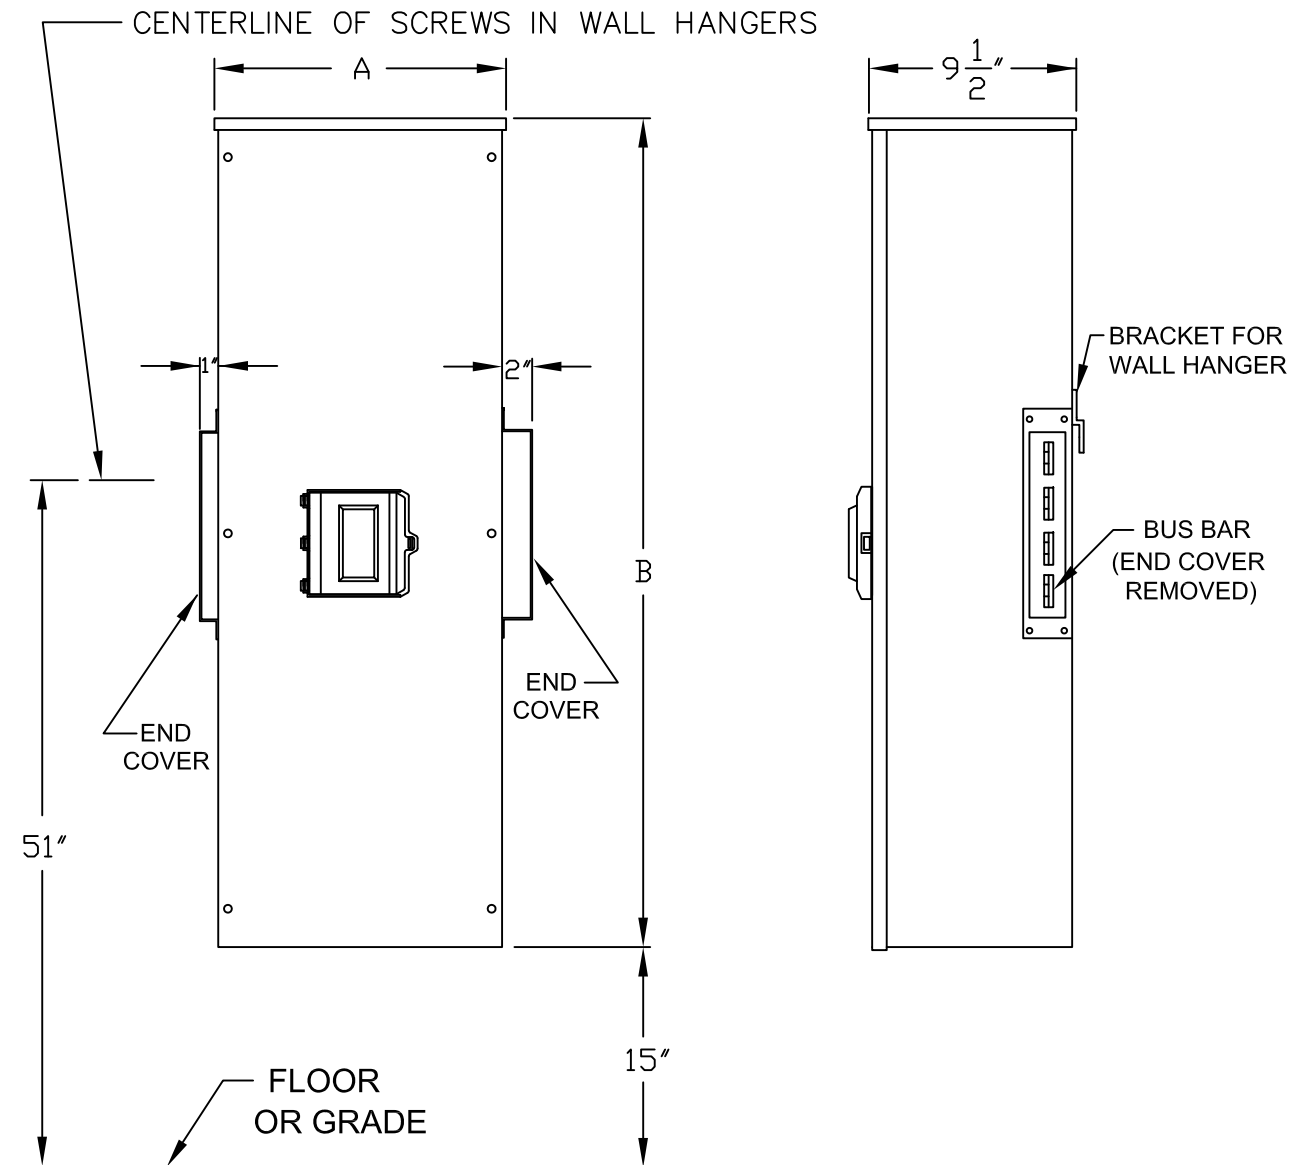

CAT.NO.	AMPS	CUTLER-HAMMER CCT.BRKR.TYPE	DIM. A	DIM. B	SHORT CIRCUIT RATING RMS SYM. AMPS. AT 240V. *
DK425N	100-400	KD	14 3/8"	64"	65,000
HKD425N	100-400	HKD	14 3/8"	64"	100,000
LD426N	300-600	LD	22 3/8"	64"	65,000
HLD426N	300-600	HLD	22 3/8"	64"	100,000
MDL427N	400-800	MDL	22 3/8"	64"	65,000
HMDL427N	400-800	HMDL	22 3/8"	64"	100,000
ND428N	801-1200	ND	22 3/8"	64"	65,000
HND428N	801-1200	HND	22 3/8"	64"	100,000

\* SHORT CIRCUIT CURRENT RATINGS OF PANELBOARD WILL NOT EXCEED THE LOWEST SHORT CIRCUIT CURRENT RATING OF ANY MAIN OR BRANCH DEVICE.

- ENCLOSURES ARE TYPE 3R FOR OUTDOOR OR INDOOR USE.
- END COVERS ARE REMOVABLE. COVER THAT IS REMOVED WHEN CONNECTING TERMINATION BOX TO METER PANEL IS TO BE INSTALLED ON END METER PANEL UNIT.