


240 VOLTS BOTTOM-FEED MAIN SWITCHES CLASS 'J' OR CLASS 'L' FUSIBLE

FOR
ERICKSON ELECTRICAL EQUIPMENT CO.
COMMERCIAL METERING PANELBOARDS
FOR 3Ø-4W SYSTEMS, 208Y/120V. OR 240/120V. DELTA

FEATURES:

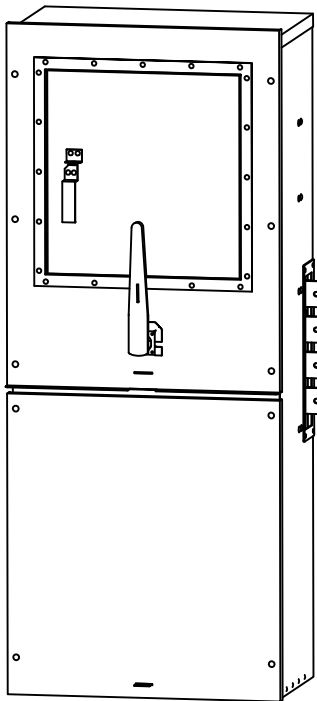

- TYPE 3R ENCLOSURES FOR OUTDOOR OR INDOOR INSTALLATIONS.
- SHORT CIRCUIT CURRENT RATINGS OF 200,000 RMS SYMMETRICAL AMPERES @ 240V. BUT NOT MORE THAN WITHSTAND RATINGS OF BRANCH OVERCURRENT DEVICES.
- COPPER BUS BAR, SILVER PLATED OR TIN PLATED.
- ALUMINUM ENCLOSURES INSTALL EASILY, NEVER RUST.
- PROVISIONS FOR TERMINATING THE LINE CONDUCTORS ARE LOCATED IN THE LOCKABLE AND SEALABLE COMPARTMENT BELOW THE SWITCH.
- LISTED BY UNDERWRITERS LABORATORIES INC., AS SWITCHES, MISCELLANEOUS, FILE E-52975




APPLICATION: FOR USE WITH ERICKSON TYPE 'CM' COMMERCIAL METERING PANELBOARDS AND OTHER METERING EQUIPMENT WHERE A MAIN FUSIBLE SWITCHES ARE INDICATED OR DESIRED.

RATINGS: 400, 600 & 800 AMPS. SIZES AVAILABLE.

www.ericksonelectric.com

ERICKSON ELECTRICAL EQUIPMENT CO.
475 BONNIE LANE • ELK GROVE VILLAGE, IL 60007
TELEPHONE: (847) 640-7701 / 1-800-952-7225
FAX: (847) 640-0565

BOTTOM-FEED MAIN SWITCHES

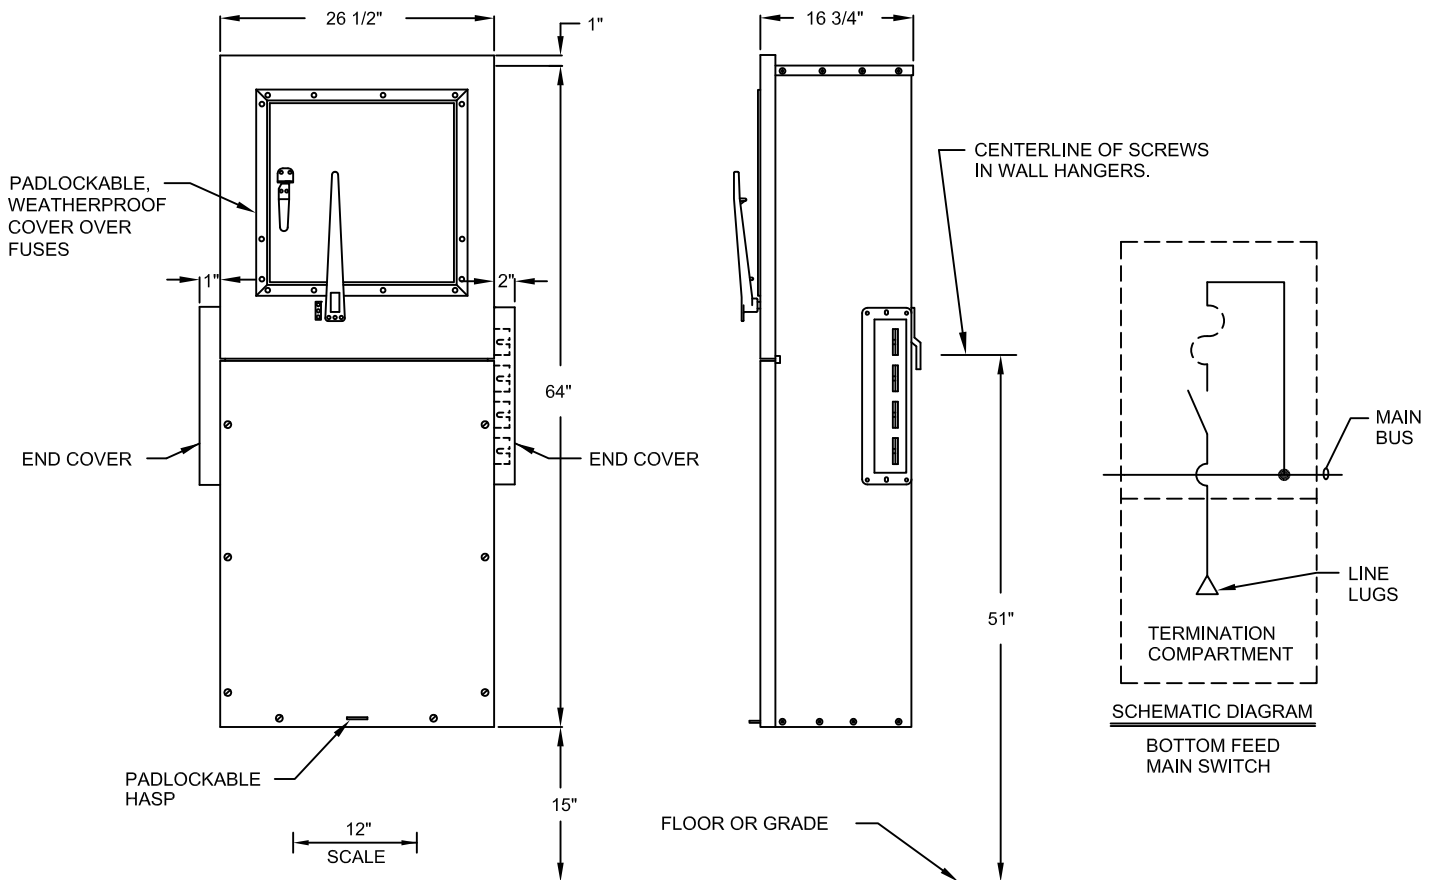

* CATALOG NUMBER		AMP. RATING	LINE LUGS PER PHASE 600MCM - #2	FUSE
1PH 3W	3PH 4W			
CM-BFMS325N	CM-BFMS425N	400	2	CLASS J
CM-BFMS326N	CM-BFMS426N	600	2	CLASS J
CM-BFMS327N	CM-BFMS427N	800	4	CLASS L

* CABINETS HAVE 1200A COPPER CROSS BUS.
SUFFIX "CM7" INDICATES 800A ALUMINUM CROSS BUS

- END COVERS ARE REMOVABLE. COVER THAT IS REMOVED WHEN CONNECTING SWITCH CABINET TO ADJACENT UNIT IS TO BE INSTALLED ON END UNIT.
- ENCLOSURES ARE TYPE 3R, FOR OUTDOOR OR INDOOR USE.