



# LAYOUT SHEET FOR MODULAR METERING UNIT PANELBOARDS


## SINGLE UNIT PANELBOARDS

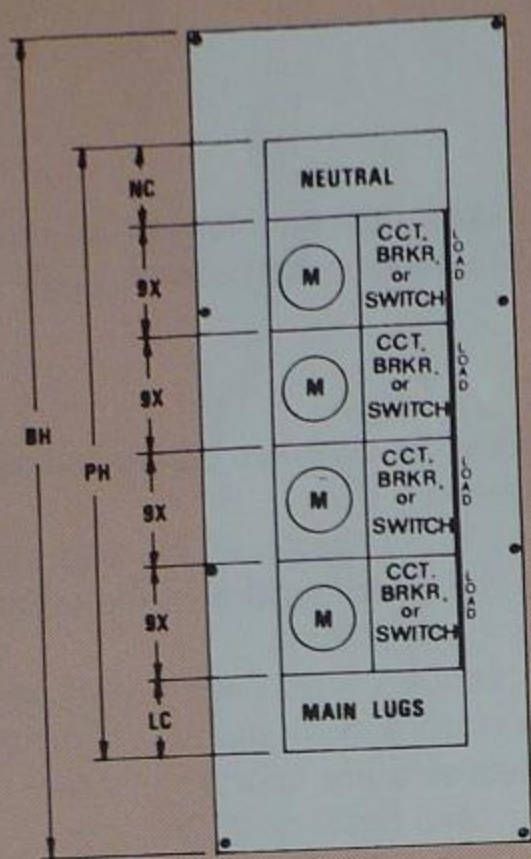

400 - 600 - 800 A.

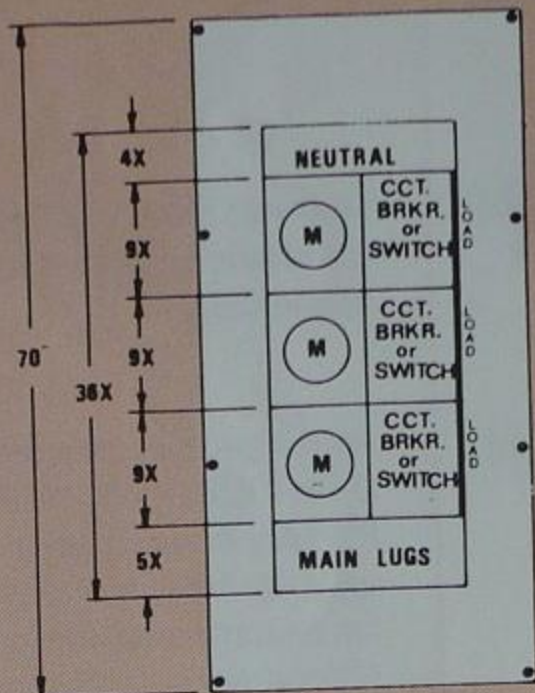


400 - 600 A.

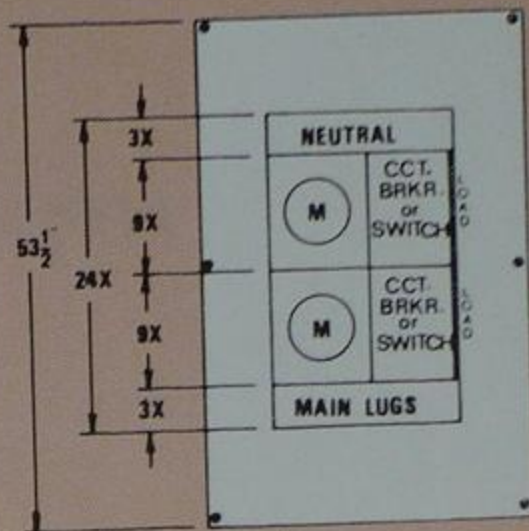


200 - 400 A.

AMPACITY	BH	PH	NC	LC
400-600 A.	78 1/4	42X	3X	3X
800A.	86 1/2	48X	6X	6X


## TWIN UNIT PANELBOARDS

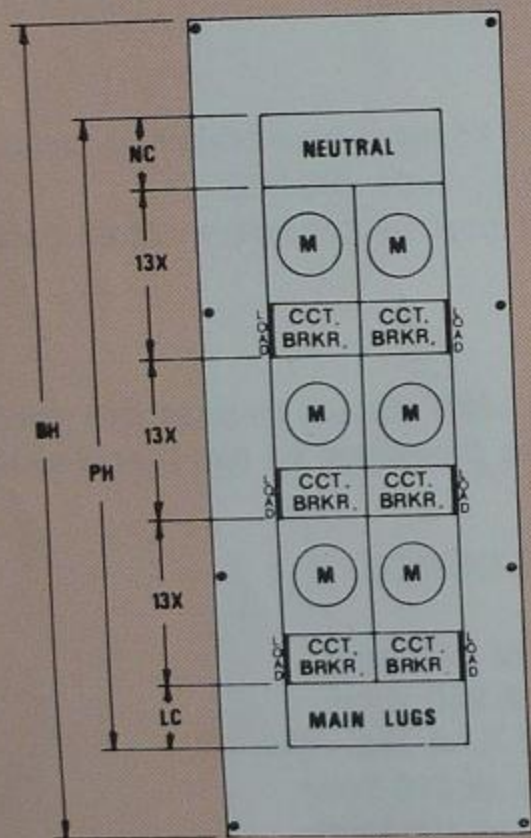

600 - 800 - 1200 A.

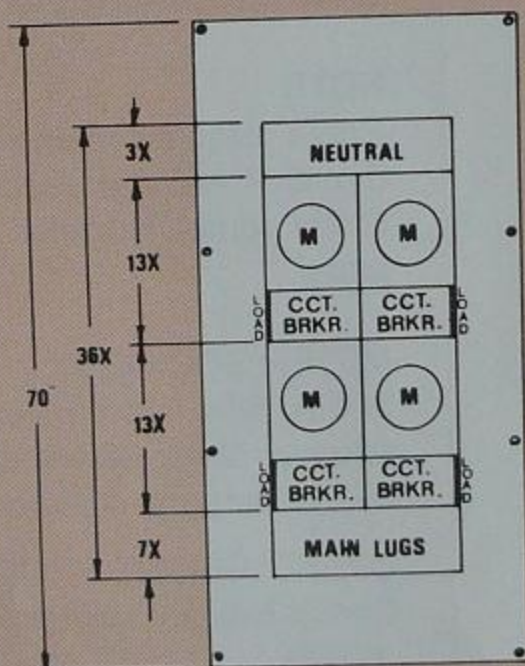


400 - 600 - 800 A.

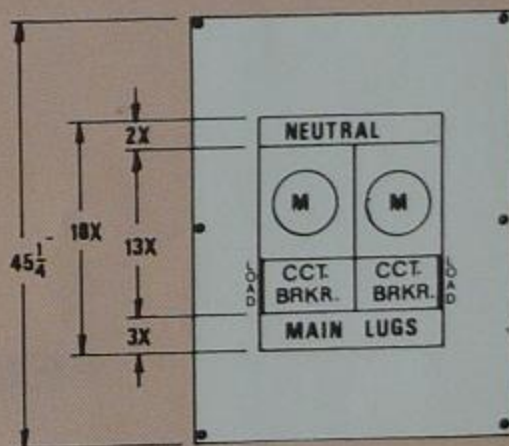


200 - 400 A.

AMPACITY	BH	PH	NC	LC
600-800A	86 1/2	48X	4X	5X
1200A	94 3/4	54X	7X	8X

## SINGLE & TWIN COMBINATION PANELBOARDS

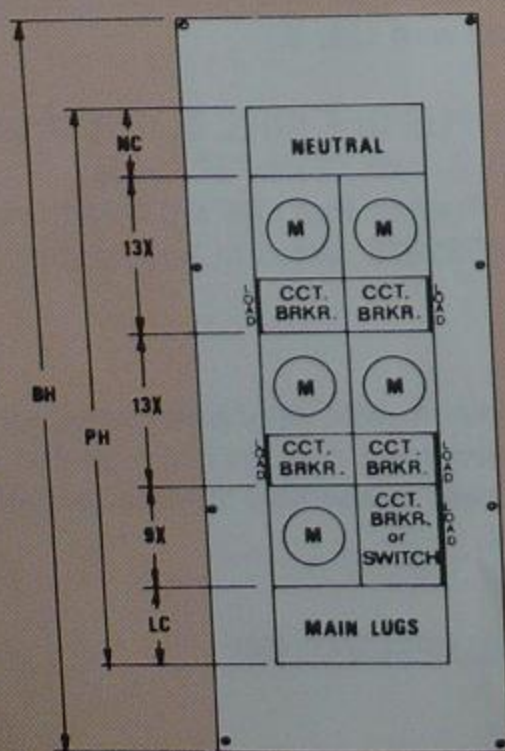

800 - 1200 A.

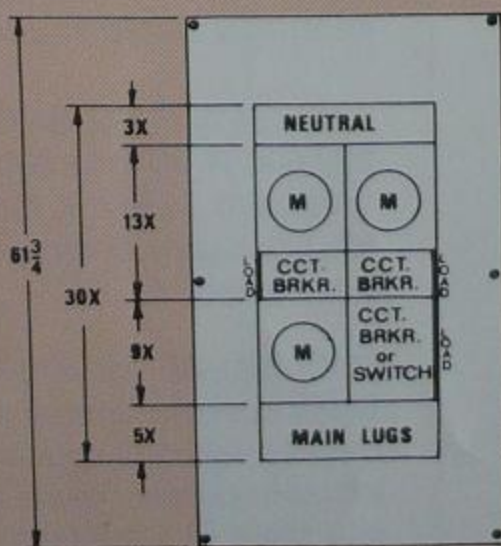


400 - 600 A.

AMPACITY	BH	PH	NC	LC
400-600A	78 1/4	42X	3X	4X
800-1200A.	86 1/2	48X	6X	7X

BH - BOX HEIGHT  
PH - PANEL HEIGHT  
NC - NEUTRAL COVER HEIGHT  
LC - LUG COVER HEIGHT

- MAIN LUG AND NEUTRAL POSTIONS MAY BE REVERSED
- ALL CABINET WIDTHS ARE 34"
- X = 1.375"
- CABINETS ARE 10" DEEP
- UNITS ARE RATED 250 - 600 VOLTS DEPENDING ON TYPE OF DISCONNECT
- INSTALLATION SUBJECT TO COMMONWEALTH EDISON CO RULES SEE CE.CO. OPERATING INSTRUCTION NO 1-2-D-16
- BOX HEIGHT DIMENSION MAY BE CHANGED FOR SPECIFIC INSTALLATIONS. WIRE SIZES FOR MAINS MUST BE KNOWN WHEN DESIGNING PANELBOARDS TO MEET 1981 NATIONAL ELECTRICAL CODE ARTICLE 384.25



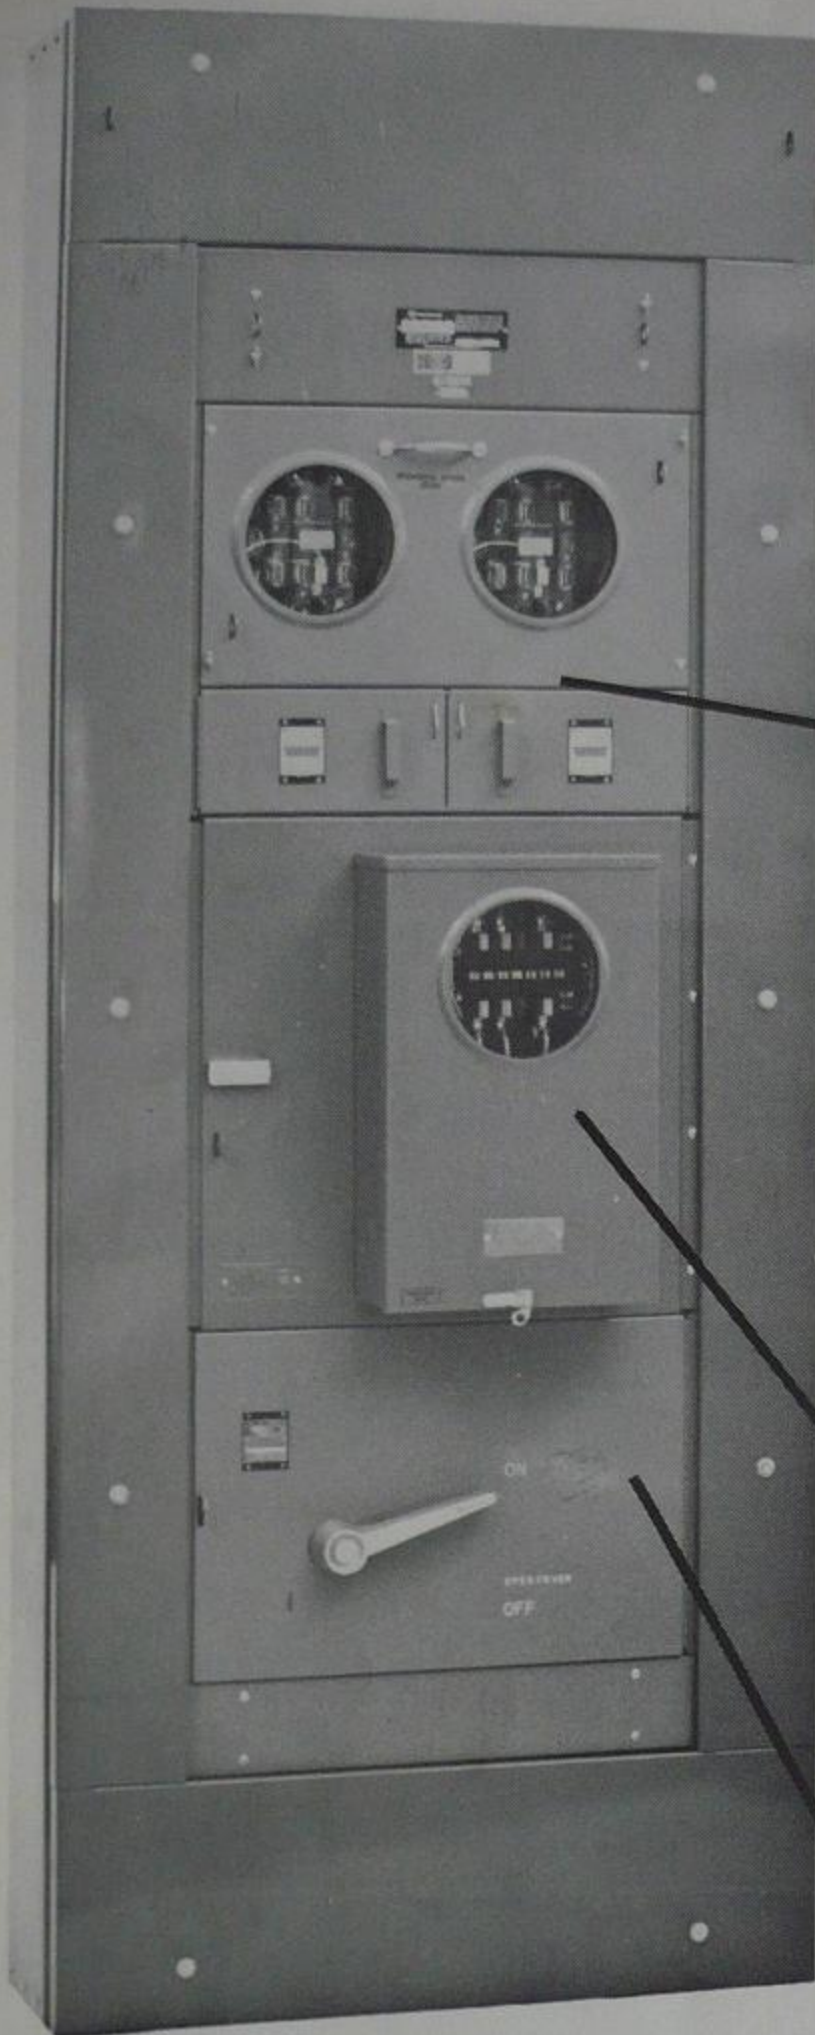

**ERICKSON PROVIDES A POLYPHASE MODULAR METERING PANEL THAT'S COMPACT YET FLEXIBLE ENOUGH FOR MOST INSTALLATIONS.**

## **MODIFICATIONS AVAILABLE**


- UTILITY CURRENT TRANSFORMER SECTION
- SINGLE AND TWIN MODULAR METERING UNITS
- SWITCH & FUSE MAIN OR SERVICE DISCONNECT SWITCHES
- CONSULT FACTORY FOR DIMENSIONAL DATA




**SINGLE METER MODULE UNIT WITH CIRCUIT BREAKER**



**SINGLE METER MODULE UNIT WITH SWITCH AND FUSE**

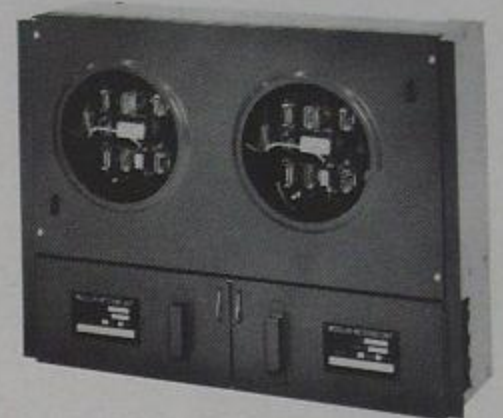

**TWIN METER MODULES WITH CIRCUIT BREAKER OR PULL OUT SWITCH FOR EACH METER**

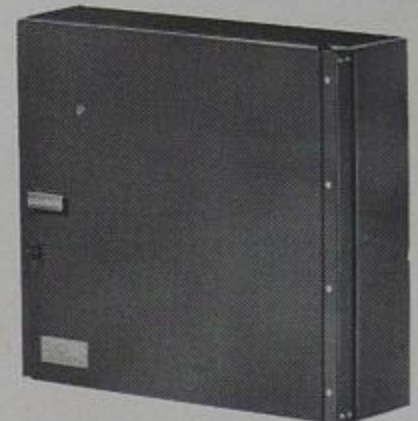

**UTILITY CURRENT TRANSFORMER SECTION AVAILABLE FROM 400 TO 1,000 A. WITH OR WITHOUT METER SOCKET**



**FUSIBLE SERVICE DISCONNECT SWITCH AVAILABLE FROM 400 TO 1,000 A.**