


480Y/277 VOLTS TYPE VL & VLB MAIN SWITCHES

(CLASS L FUSIBLE)
FOR

ERICKSON ELECTRICAL EQUIPMENT CO.

COMMERCIAL METERING PANELBOARDS

1200, 1600 & 2000A SWITCHES HAVE INTEGRAL GROUND FAULT PROTECTION
TOP FEED VL, BOTTOM FEED VLB SWITCHES.
(NON INTERCHANGEABLE WITH 240V. UNITS)

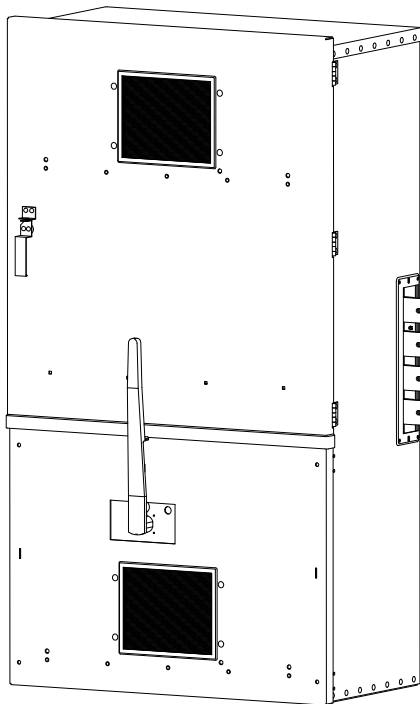

FEATURES:

- TYPE 3R ENCLOSURES FOR OUTDOOR, OR INDOOR INSTALLATIONS.
- SHORT CIRCUIT CURRENT RATINGS OF 200,000 RMS SYMMETRICAL AMPERES @ 600V, BUT NOT MORE THAN WITHSTAND RATINGS OF BRANCH OVERCURRENT DEVICES.
- COPPER BUS BAR, SILVER PLATED OR TIN PLATED
- ALUMINUM ENCLOSURES INSTALL EASILY, NEVER RUST.
- MAIN LUGS ARE SUITABLE FOR COPPER OR ALUMINUM CONDUCTORS.
- LISTED BY UNDERWRITERS LABORATORIES INC, AS SWITCHES, MISCELLANEOUS, FILE E-128632.




APPLICATION: FOR USE WITH ERICKSON TYPE '6CM' COMMERCIAL METERING PANELBOARDS AND OTHER METERING EQUIPMENT WHERE MAIN FUSIBLE SWITCHES ARE INDICATED OR DESIRED.

RATINGS: 800, 1200, 1600 & 2000 AMPS. SIZES AVAILABLE.

www.ericksonelectric.com

ERICKSON ELECTRICAL EQUIPMENT CO.
475 BONNIE LANE • ELK GROVE VILLAGE, IL 60007
TELEPHONE: (847) 640-7701 / 1-800-952-7225
FAX: (847) 640-0565

TYPE VL & VLB MAIN SWITCHES FOR 480Y/277V. MAX. TYPE 6CM PANELBOARDS

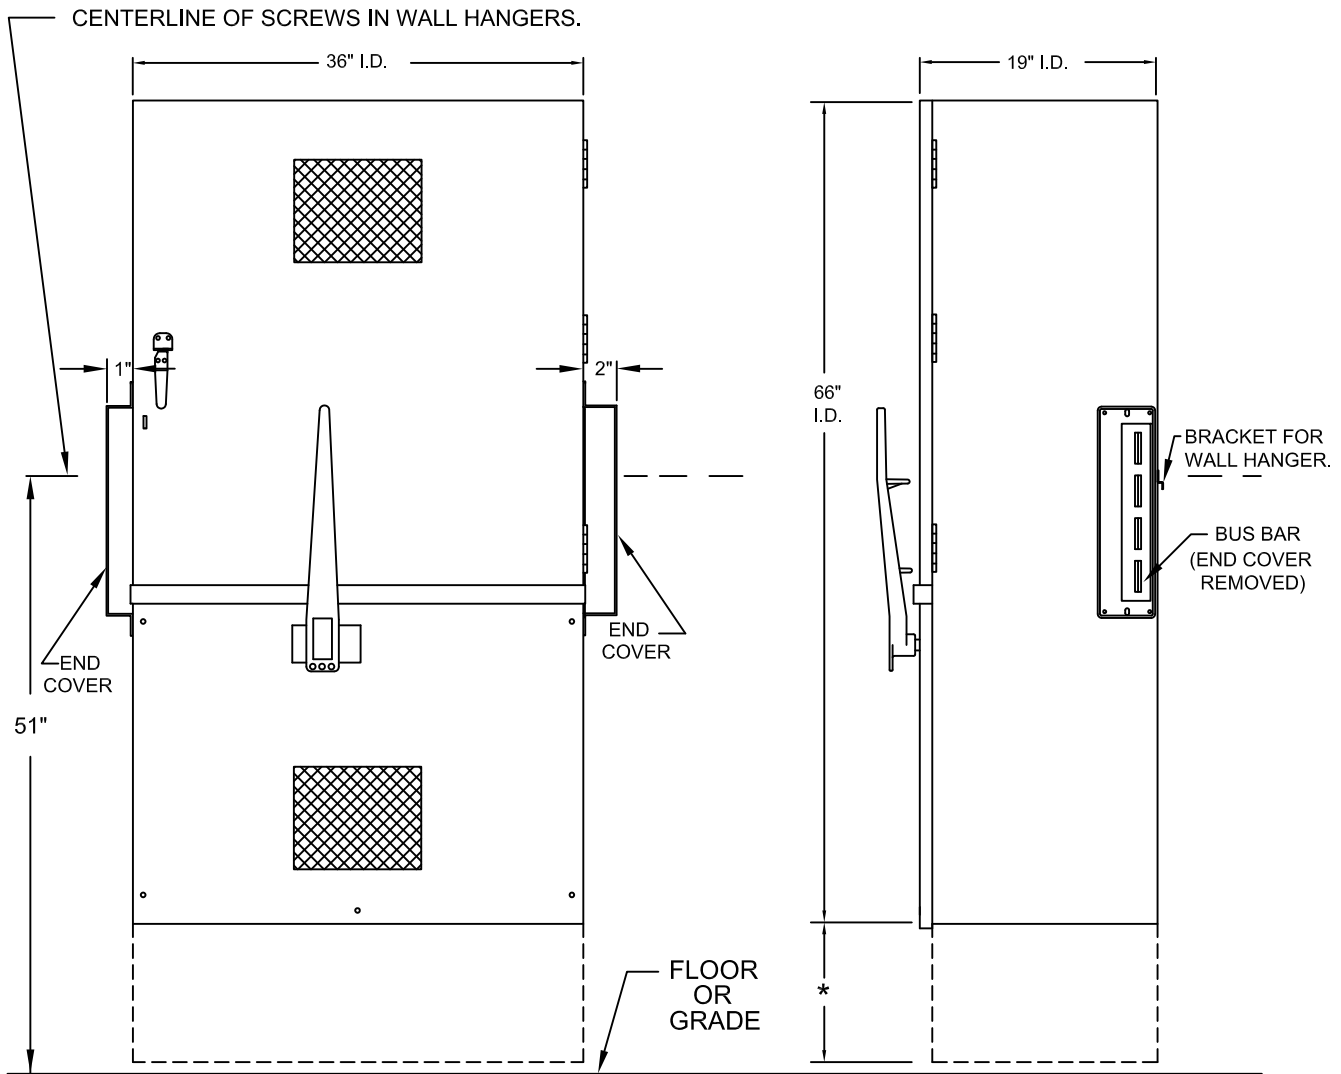

AMPS.	CATALOG NUMBER	
	TOP FEED	BOTTOM FEED
800	6CM-VL467N	6CM-VLB447N
1200**	6CM-VL468NG6	6CM-VLB448NG6
1600**	6CM-VL469NG6	6CM-VLB449NG6
2000**	6CM-VL4610NG6	6CM-VLB4410NG6 *

* INCLUDES 13" ALUMINUM
BOTTOM EXTENSION
(ADD SUFFIX "LE" TO CATALOG NUMBER)

** EQUIPPED WITH INTEGRAL GROUND FAULT EQUIPMENT AS REQUIRED BY N.E.C.

SPECIFY SIZE, AND NUMBER OF LUGS REQUIRED.

- SWITCHES ACCEPT CLASS L FUSES.
- END COVERS ARE REMOVABLE. COVER THAT IS REMOVED WHEN CONNECTING SWITCHES TO ADJACENT PANEL IS TO BE INSTALLED ON END METER PANEL UNIT.
- ENCLOSURES ARE TYPE 3R, FOR OUTDOOR OR INDOOR USE. WITH LOCKABLE SEALBLE FRONT AND PAD LOCKABLE HANDLE.
- CONSULT FACTORY FOR TYPE 1 ENCLOSURES.

